

Thermo Scientific AquaSensors AV88 AnalogPlus Universal Analyzer



AV88 AnalogPlus™ Universal Analyzer

- Connects to any AnalogPlus sensor using plug-in module
- Convenient ¼ DIN enclosure
- Display sensor and temperature data
- Menu functions: Calibration, configuration and diagnostics
- Digital protocol options for remote measurement, calibration, configuration and diagnostics
- Two 4 to 20 mA current outputs
- Two Form C relays for alarm, control and wash
- PID controller for use with pH and conductivity
- 7 conduit knockouts for easy cabling

AV88 AnalogPlus Universal Analyzer Shown with NEMA 4X Enclosure.

Features and Benefits

Mounting Options


- Enclosure, NEMA 4X
- ½ DIN NEMA 4X panel mount
- Display only with NEMA 4X gasket

Interface

- **Display:** 2 line by 16 character LCD
- **Backlight:** High contrast green
- **Keypad:** 4 directional arrows, MENU, ESCAPE and ENTER

Environmental Conditions

- **Ambient Operating Temperature Range:** -20 to 65 °C
- **Maximum Relative Humidity:** 95% non-condensing
- Meets CE requirements for heavy industrial use

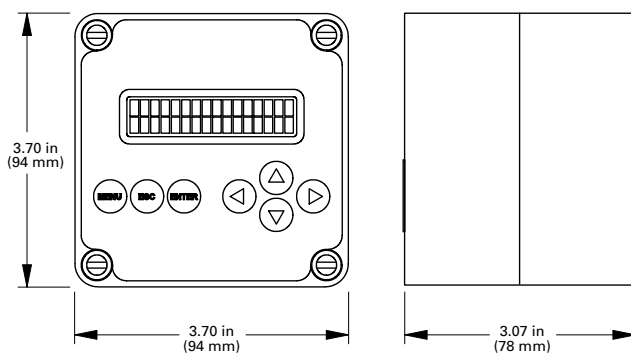

AV88 Universal Analyzer Module Mounted to Enclosure with NEMA 4X Seal
¼ DIN, Dimensions in Inches (mm)

Thermo Scientific AquaSensors AV88 AnalogPlus Universal Analyzer

- Global support — with experience that comes from supporting our customers for over 35 years throughout the world, our water quality specialists and customer support teams offer a quick, thorough and professional response to any problem encountered.
- Focus on user benefits — we work closely with you to define your needs, and ensure you are using the monitor in a way that improves your bottom line. For more information, contact your local water quality specialists or visit www.thermo.com/processwater.

AV88 AnalogPlus Universal Analyzer Specifications

Mounting Options	Wall-mount Enclosure: NEMA 4X Panel-mount: ¼ or ½ DIN NEMA 4X panel mount available Display Only: with NEMA 4X gasket
User Interface	Display: 2 line by 16 character LCD Backlight: High contrast green Keypad: 4 directional arrows, MENU, ESCAPE and ENTER
Environmental Conditions	Ambient Operating Temperature Range: –20 to 65 °C Maximum Relative Humidity: 95% non-condensing
Interchangeable Sensor Modules	A 1-inch long personality module plugs in to the AV88 to make it work with any AnalogPlus sensor configured with a PT1000 temperature element Supported Sensors: pH, ORP, two electrode conductivity, two electrode resistivity, toroidal conductivity, dissolved oxygen and dissolved ozone
4 to 20 Milliamp Current Output Options	Two isolated outputs (standard) Assignable parameters PID function when pH or conductivity parameter selected Loop power provided by AV88
Relays	Two 1 amp Form C relays with NO and NC contacts Assignable parameters Configured for alarm, control and timer functions
Digital Communications	Options to Host Computer Network: MODBUS® RTU, DeviceNet, Modbus RS232, RS232 ASCII, CANopen, Ethernet IP, Modbus TCP, TCP/IP Others: Consult factory
Power Supply	Input: 10 to 30 VDC or 100 to 240 VAC (optional) Power: 2W at 25°C
Approvals	Meets CE requirements for heavy industrial use

Ordering Information

Part No.	Description
AV88-v-w-x-y-z	Universal Analyzer
Measurement Parameter (v)	A = pH B = ORP C = Conductivity D = Resistivity E = Toroidal Conductivity F = Dissolved Oxygen (ppm) G = Dissolved Ozone
Enclosure (w)	B = ¼ DIN NEMA 4X Wall-mount Enclosure
Communications (x)	0 = None 1 = RS232 ASCII 2 = Modbus RS232 4 = MODBUS RTU (for Modbus + Profibus) 5 = DeviceNet 6 = CANopen 7 = Ethernet IP, Modbus TCP, TCP/IP
Relays (y)	A = None C = Two
Power (z)	1 = 24 VDC 2 = 100 to 240 VAC

Consult factory for additional configurations and accessories.

©2008 Thermo Fisher Scientific Inc. All rights reserved. AquaSensors, Modbus is a registered trademark of Schneider Automation, Inc. DataStick and all other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries.



S-ASAV88-E 1108 RevA

Environmental Instruments
Water Analysis Instruments

North America
166 Cummings Center
Beverly, MA 01915 USA
Toll Free: 1-800-225-1480
Tel: 1-978-232-6000
Dom. Fax: 1-978-232-6015
Int'l Fax: 978-232-6031

Europe
P.O. Box 254, 3860 AG Nijkerk
Wallerstraat 125K, 3862 BN
Nijkerk, Netherlands
Tel: (31) 033-2463887
Fax: (31) 033-2460832

Asia Pacific
Blk 55, Ayer Rajah Crescent
#04-16/24, Singapore 139949
Tel: 65-6778-6876
Fax: 65-6773-0836

www.thermo.com/water

Thermo
SCIENTIFIC