



DEUTA

Multi-Functional Recorders

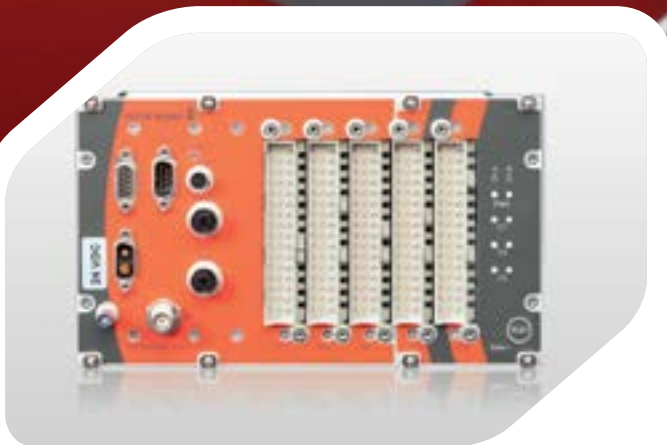

DEUTA-WERKE 
Technology under Control

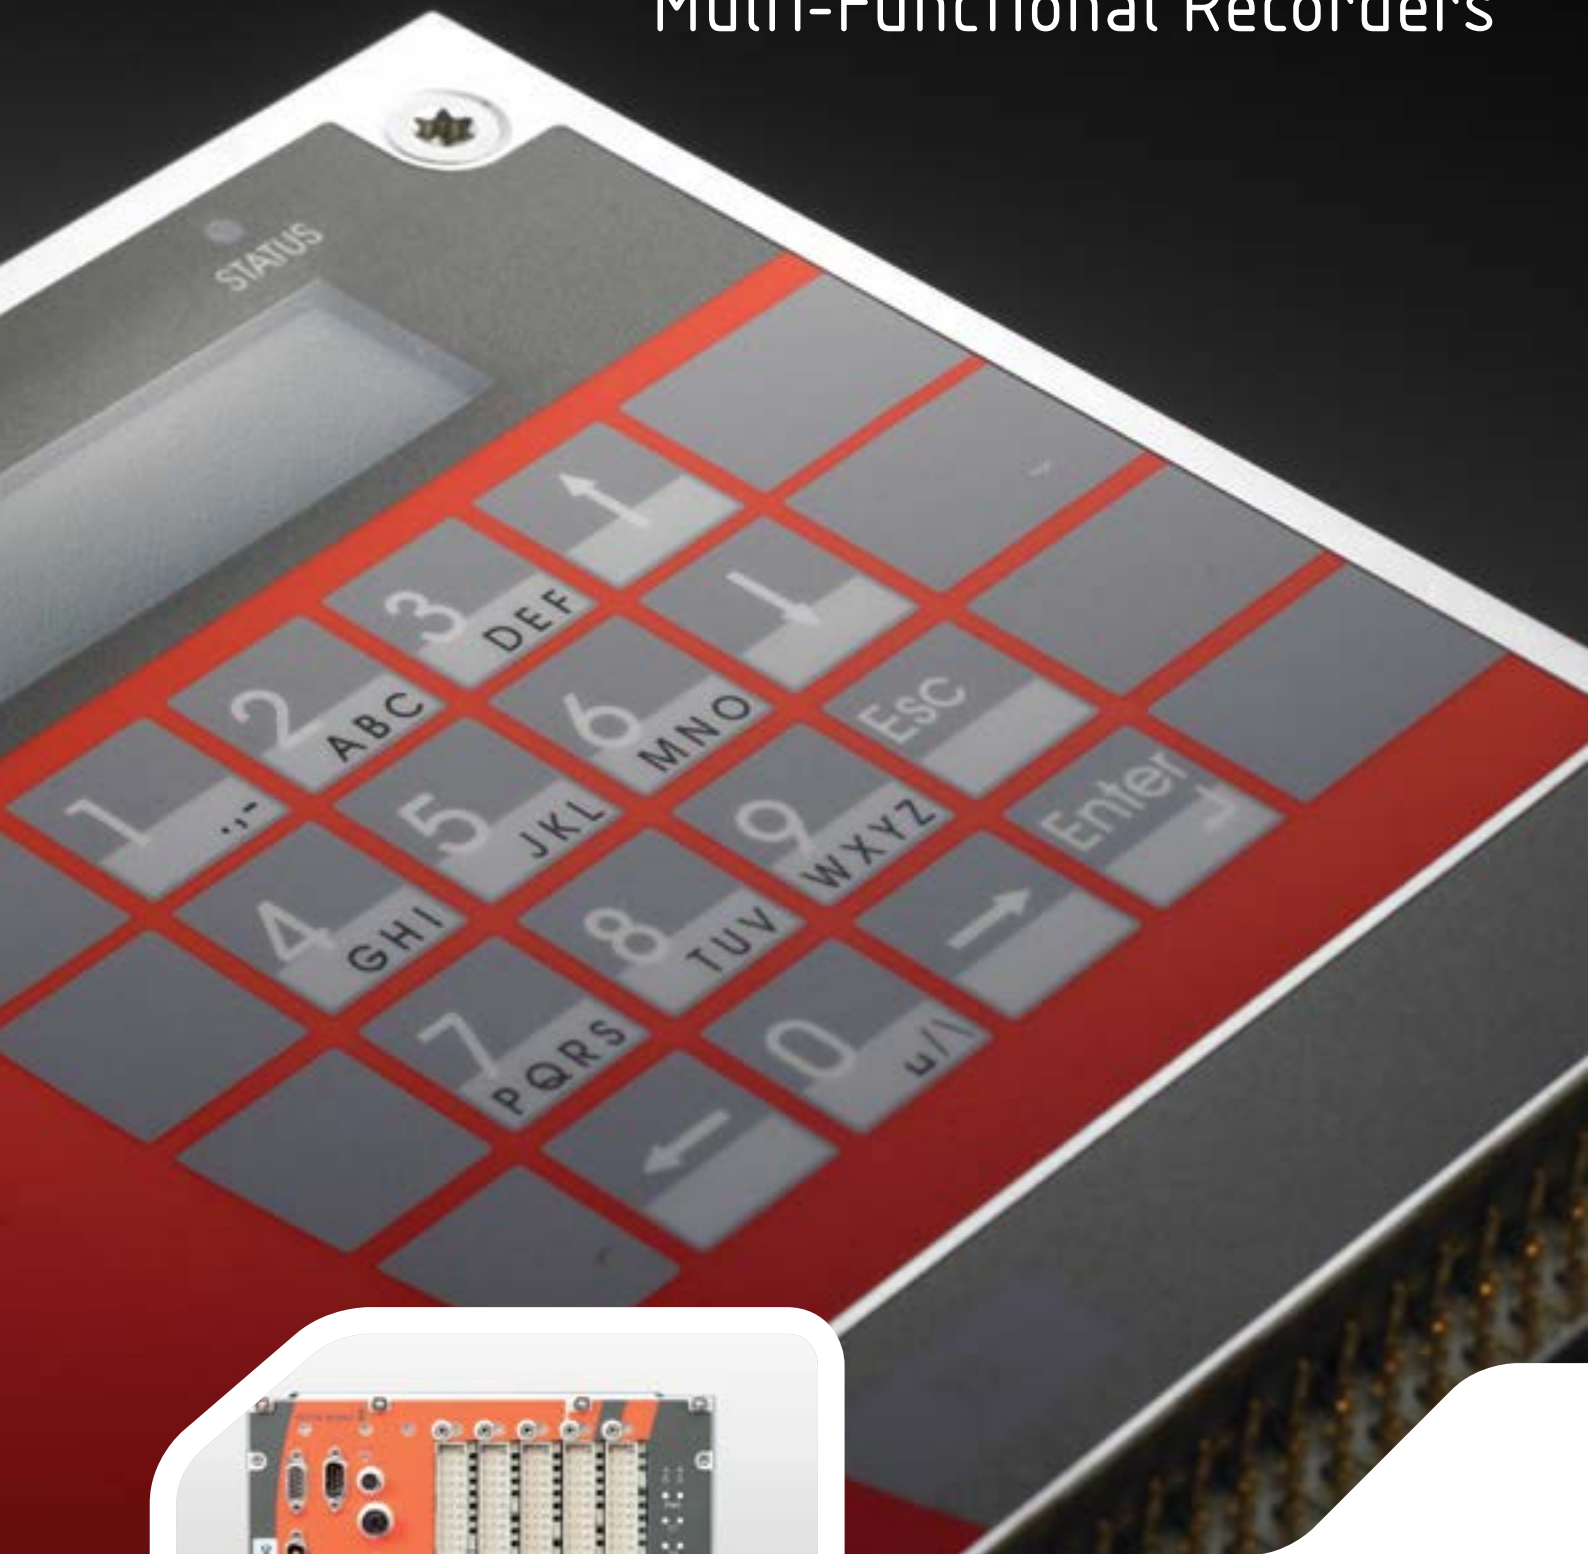

»DEUTA REDBOX® - Recorder Variety

from the Data Logger to the Multi-Functional Recorder!«

DEUTA REDBOX® for all events

The right DEUTA REDBOX® is available for every application. From the REDBOX^{log} data recorder to the REDBOX^{flex safe+} multi-functional recorder with variable interface flexibility and SIL functions.

Make the DEUTA REDBOX® the heart of your railway safety!


SIL safe

Obsolescence optimised

Flexibly configured

ETCS tested

World-wide availability



»DEUTA REDBOX® - A world - as versatile as your applications!«

- **Versatile:** One hardware platform for all possible variations
- **Flexible:** Adapts its hardware and software to your system environment
- **Individual:** You determine which functions you need
- **Convenient:** Service functions for reading out and evaluating the travel data
- **Unique:** Our know-how and world-wide support

»From the Data Logger to the Multi-Functional Recorder: the Multitasking Talent DEUTA REDBOX®!«

DEUTA produces the right REDBOX for your individual application
DEUTA REDBOX® recorders adapt perfectly to every vehicle environment.
The clever REDBOX concept offers travel data security and
innovative service and evaluation possibilities - world-wide.



REDBOXlog REDBOXpro REDsafe REDBOXflex REDBOXmaster



REDBOXopen



REDBOXflex safe+



REDBOXtop

Flexibility and versatility thanks to the the platform concept

Whatever area of application you are planning for your DEUTA REDBOX® – the basic equipment is identical: A uniform platform for all REDBOX recorder variants. The unit core consisting of the communication structure, the microprocessor and the memory module forms the solid basis. Consistently developed, produced, tested and qualified by DEUTA staff, actively accompanied by our obsolescence management.

Regardless of whether you want to integrate your DEUTA REDBOX® as a data logger or as a multi-functional recorder in a complex communication structure – your REDBOX is equipped for all applications. DEUTA configures the right REDBOX for every area of application – quickly and flexibly.

Simple integration in the project

The DEUTA REDBOX® hardware always finds room. The multi-functional recorders are easy to integrate in your application environment as a 19" drawer unit in the control cabinet or as a box version.

Under observation world-wide

With the integrated REDBOX Web Interface you communicate directly with your REDBOX. You have parameters such as recorder status, status of the data memory or communication status under control at all times. Adaptation to different operating systems is obsoleted by the web browser. Wherever your vehicle may be, the REDBOX remote diagnostics package will give you professional support from DEUTA at all times.

Data download and evaluation – as you want it

The travel data can be read out by a USB stick or over the Ethernet interface. The ADS 4 evaluation software allows easier evaluation of recorded travel data even in high resolution in tables or graphics.

Compliant with standards

The DEUTA REDBOX® multi-functional recorders comply with standards including, but not limited to, the following: EN 50155, EN 50121-3-2, EN 50126, EN 50128, EN 50129, IEEE1482.1 and FRA.

»DEUTA REDBOXlog-

Your Recorder for Juridical Data!«

- Compact
- All data via bus communication
- Available as a box version or 19" drawer unit
- Int. Compact Flash, 2 GB
- 2 x Ethernet and 1 x USB for maintenance and data download
- TSI compatible

The mother of all REDBOXES

The DEUTA REDBOXlog stores juridical data reliably and across borders. The unit core consisting of the communication structure, the microprocessor and the memory module forms the solid basis of all REDBOX recorders.

Travel data memory

- Stores travel data in the highest resolution on an internal Compact Flash card
- Reads out travel data onto a USB stick
- Reconstructs travel data in best resolution

Housing

- Space-saving and compact
- Easy to mount
- User-friendly design

Service concept

- Clearly arranged and with global access using a standard web browser
- No adaptation to different operating systems
- Compatible with DEUTA ADS 4 evaluation software

Cross border travel data

- ETCS/ERTMS-compatible
- Optionally with protected memory
- TSI-compatible




REDBOXlog (19")



REDBOXlog (Box)

Feature/Specification	DEUTA REDBOXlog	
Operating voltage	24 VDC or 110 VDC	
Power consumption	max. 10 W	
Temperature range	-25°C to +70°C (operation)	
	-40 °C or up to +85 °C (storage)	
Storage medium	int. CompactFlash 2 GB	
Vehicle buses	MVB, Ethernet	
	CAN & Profibus optionally	
Serial interfaces	RS 232, RS 422/485 optionally	
Service PC connection	1 Ethernet, 1 USB	
Dimensions	19" drawer unit	Box
	Width	71.12 mm (14 TE) 245 mm
	Height	128.4 mm (3 HE) 160 mm
	Depth	169 mm 50 mm
	Weight	approx. 1.2 kg approx. 2 kg
Protection category	IP 20	IP 20

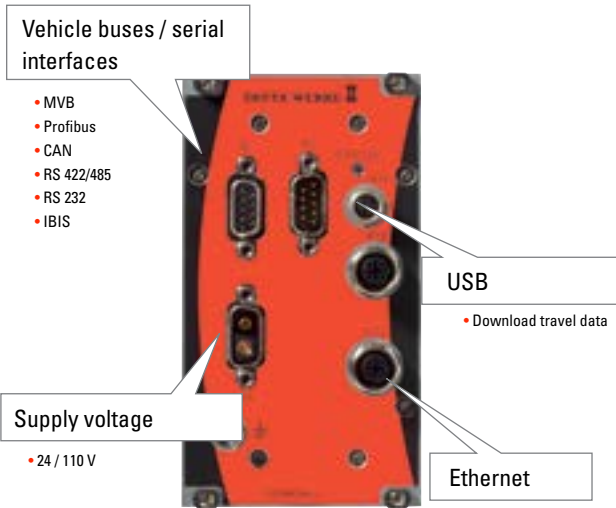

»DEUTA REDBOXpro-

Your Recorder with Display and Keyboard!«

- Can be integrated everywhere
- Internal Compact Flash, 2 GB
- Digital Inputs and Outputs
- Display and keyboard version

Your options

The DEUTA REDBOXpro can, thanks to its housing shape, be positioned anywhere in the vehicle to save space. A clear display and a user-friendly keyboard are available optionally.

Travel data memory

- Stores travel data of communication buses or wired inputs/outputs in highest resolution on an internal Compact Flash card
- Reads out travel data onto USB stick
- Reconstructs travel data in any resolution

Housing

- Space-saving and compact
- Easy to mount
- User-friendly design
- Display and keyboard optional

The service concept

- Clearly arranged and with global access using a standard web browser
- No adaptation to different operating systems
- Compatible with DEUTA ADS 4 evaluation software

Display and keyboard

- Displays different characters
- User-friendly keyboard
- Possible to enter wheel diameter, vehicle number and train driver number



REDBOXpro
(with display and keyboard)



REDBOXlog (Box)
(Standard)

Feature/Specification	DEUTA REDBOXpro
Operating voltage	24 VDC or 110 VDC
Power consumption	max. 15 W
Temperature range	-25°C to +70°C (operation) -35°C to +85 °C (storage)
2 frequency inputs	Squarewave, f _{max} 10,0 kHz
2 analogue inputs	± 0 to 10 V or 0 (4) to 20 mA
20 digital inputs	High level +12 to +154 V DC
Recording raster	Triggered by distance, time or event
Storage medium	int. CompactFlash 2 GB
2 analogue outputs	0 to 10 V or 0 (4) to 20 mA
2 transistor outputs	Open Collector
6 relays	Changeover contacts
Vehicle buses	MVB, Ethernet CAN & Profibus optionally
Serial interfaces	RS 232, RS 422/485 optionally
Service PC connection	1 Ethernet, 1 USB
Membrane keypad	16 keys (optional)
Display resolution	122 x 32 pixels (optional)
Dimensions	
Width	245 mm
Height	160 mm
Depth	50 mm
Weight	approx. 2 kg
Protection category	IP 20
Connection	2 F48 plugs, DIN 41612 for IP 20 M12 d round connector, M8 round connector, 3 D-Sub plug 9-pin

»DEUTA REDBOXflex- the "All-in-one" Recorder!«

- Flexible in the hardware structure
- Several communication buses simultaneously
- Digital inputs and outputs as desired
- Extendible with SIL functions
- TSI approval

Flexible and versatile

The flexible "All-in-one-Recorder" DEUTA REDBOXflex was developed according to the current CENELEC standards and is compatible with ETCS and ERMTS. The REDBOXflex is excellently suited for local and long distance traffic. You have a constant close eye on diagnostics, device status, parameters and configurations with the Web Interface. The Service functions are especially convenient: You simply read out the data over the USB or Ethernet interface and analyse the data with the DEUTA evaluation software ADS4.

Flexibility through standardisation

- Compact 19" hardware design
- The mainboard is the system headquarters
- Future-proof performance for a multiple vehicle bus system and an I/O expansion
- Numerous inputs and outputs provide more flexibility
- Further interfaces can be varied in modules, depending on the field of application
- ERMTS/ETCS recorder
- GPS
- Optionally with protected data memory for juridical data

Service via Web Interface


- Clearly arranged and with global access
- No adaptation to different operating systems
- Compatible with the DEUTA ADS 4 evaluation software

Convenience with travel data memory

- Stores travel data in the highest resolution on an internal Compact Flash card
- Reads out travel data over USB and Ethernet
- Reconstructs travel data in any resolution



REDBOXflex

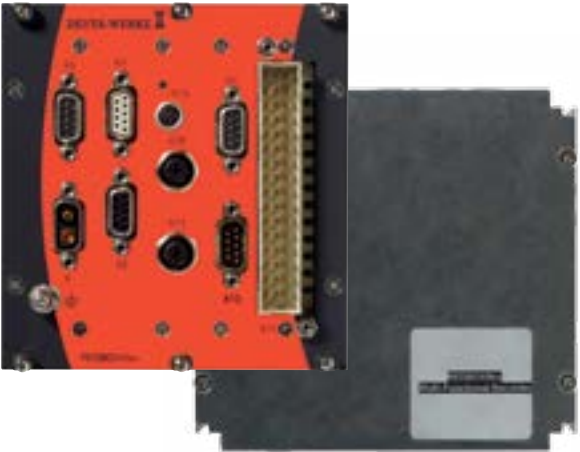

Feature/Specification	DEUTA REDBOXflex
Operating voltage	24 VDC or 110 VDC
Power consumption	max. 15 W
Temperature range	-25°C to +70°C (operation) -40 °C to +85 °C (storage)
2 frequency inputs	Squarewave, f _{max} 10,0 kHz
2 analogue inputs	± 0 to 10 V or 0 (4) to 20 mA
4 digital inputs	High level +12 to +154 V DC
Recording raster	Triggered by distance, time or event
Storage medium	int. CompactFlash 2 GB
2 analogue outputs	0 to 10 V or 0 (4) to 20 mA
2 transistor outputs	Open Collector
1 relays	Changeover contact
can be extended with additional I/O cards	
Vehicle buses	MVB, Ethernet CAN & Profibus optionally
Serial interfaces	RS 232, RS 422/485 optionally
Service PC connection	1 Ethernet, 1 USB
Tracking	GPS
Dimensions	
Width	121.92 mm (24 TE) 19"
Height	128.4 mm (2 HE) 19"
Depth	180 mm
Weight	approx. 1,2 kg
Protection category	IP 20
Connection	1 F48 plugs, DIN 41612 for IP 20 2 M12 d round plug, M8 round plug (Ethernet) 6 D-Sub plug 9-pole (USB)

»DEUTAsafe+ -

the Safety Module!«

- For requirement levels SIL 2 to SIL 4
- Several SIL functions configurable
- Integrates into all DEUTA REDBOX® versions
- Complete SIL-Engineering by DEUTA

Safety up to SIL 4


The Safe+ module takes over safety functions for the requirement levels SIL 2 to SIL 4 and thus extends the safety-related field of application of the DEUTA REDBOX® series. The two-channel "fail-safe" structure forms the basis for the functional technical safety of the Safe+ module.

The Safe+ module was developed according to the standards EN 50126, EN 50128, EN 50129 as well as EN 50155 and controls the following functions:

- Driving safety switch DSD
- Standstill detection
- Rollback protection
- Monitoring of maximum speed
- Monitoring of limit speed
- Speed signals

The concept of the Safe+ module allows high flexibility in the configuration, the parametrisation and the application, e.g. as a time-time or distance-distance DSD. The Safe+ module can be used autonomously as a "stand-alone" unit REDsafe or can be combined with the REDBOXflex recorders. The versatile hardware structure allows the Safe+ module to be integrated into many different vehicle architectures.

DEUTA supports the expertise process of your Safe+ module up to certification.

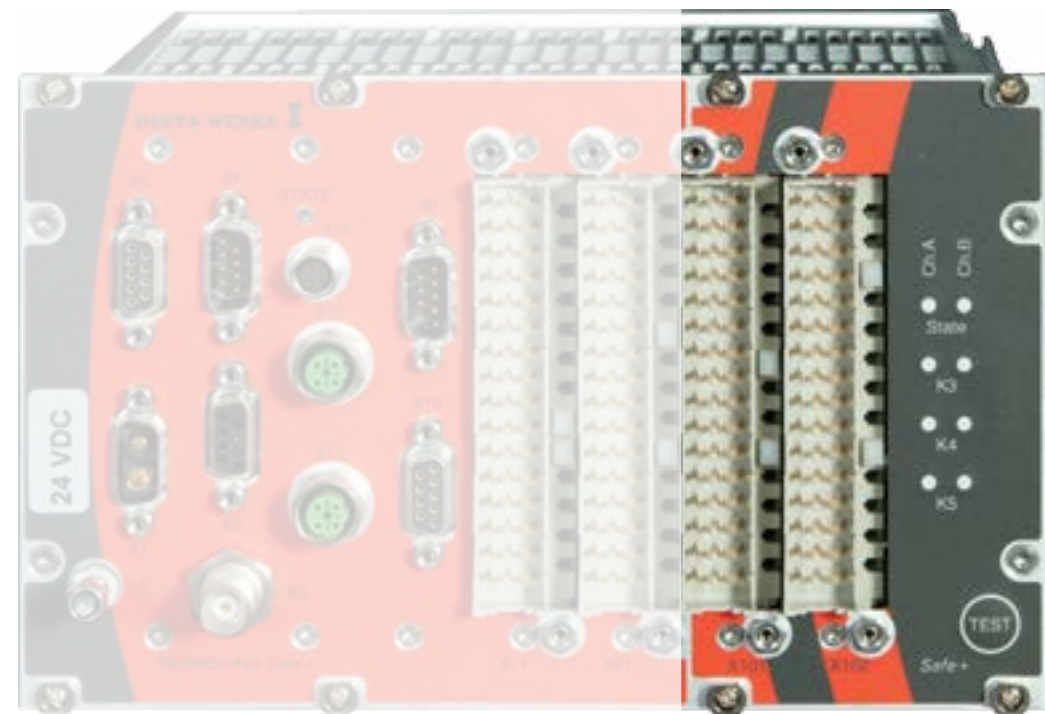

Functions of the Safe+ module at a glance:

Driving safety switch – DSD

This DSD function of the Safe+ module stops the locomotive through forced braking, should the locomotive driver become incapacitated during the trip.

Monitors the limit and maximum speed

With this function the Safe+ module continuously checks the current speed for compliance with a defined limit speed ($V_{act} \leq V_{limit}$). The status of the appropriate output (relay) is changed on exceeding this speed.

The maximum speed is also monitored. If the maximum speed is exceeded, forced braking takes place until the vehicle drops back below the maximum speed (intermittent forced braking).

Protects against unwanted rolling

Prevents the unintentional movement of the vehicle for required standstill through forced braking.

Detects standstill of the train

Uses a signal to report that the vehicle is no longer moving discernibly.

Supplies the speed

The vehicle speed measured by the Safe+ can be provided to safe systems by an analogue signal of 4 - 20 mA.

»DEUTA REDBOXflex safe+ - for flexibility and safety!«

- "All-in-one" recorder: Recording
Communication
Control
Safety

Safe, safer, REDBOXsafe+

REDBOXflex safe+ is a combination of a REDBOXflex recorder with a Safe+ module. The advantages of the REDBOXflex and the safety of the Safe+ functions are available in one compact drawer unit:

Flexibility in the structure

Easily configurable hardware and software.

Travel data recording

All possibilities of the DEUTA REDBOX® can be used, including the backup in the protected data memory PMU.

Bus communication

The familiar combination buses such as MVB, Profibus or CAN can be implemented individually or in combination. The safe communication with the Safe+ module extends the flexibility of the configuration.

Direct signals

Connection to the speed and radar sensors allows calculation of the travel speed. Different input or output signals can be configured optionally.

Safety functions

All functions of the Safe+ module can be applied to:

- DSD
- Standstill detection
- Rollback protection
- Maximum speed
- Limit speed
- Speed signals

DEUTA supports the expertise process of your REDBOXflex safe+ module up to certification.




REDBOXflex safe+

Example configuration	DEUTA REDBOXflex safe+
Operating voltage	Nominal 24, 72 or 110V
Power consumption	max. 30 W
Temperature range	-25°C to +70°C (operation) -40 °C to +85 °C (storage)
2 frequency inputs	Squarewave, f _{max} 10,0 kHz
2 analogue inputs	± 0 to 10 V or 0 (4) to 20 mA
24 digital inputs	High level +12 to +154 V DC
Recording raster	Triggered by distance, time or event
Storage medium	int. CompactFlash 2 GB
2 analogue outputs	0 to 10 V or 0 (4) to 20 mA
2 frequency outputs	Squarewave, f _{max} 5,0 kHz
Outputs	2 transistor outputs with Open Collector
Vehicle buses	MVB, Ethernet CAN & Profibus optionally
Serial interfaces	RS 232, RS 422/485 optionally
Service connections	1 Ethernet, 1 USB
Tracking	GPS
Example configuration	safe+
Safety functions	Driving safety switch DSD Standstill detection Rollback detection Monitoring of the limit speed Monitoring of the maximum speed Speed signals
Dimensions	
Width	40 TE (202 mm)
Height	128.4 mm (3 HE)
Depth	169 mm
Weight	approx. 2,5 kg
Protection category	IP 20
Connection	4 x F48 plugs, DIN 41612 for IP 20 2 M12 d round plug, M8 round plug (Ethernet) 4 x D-Sub plug 9-pin (USB)

»DEUTA REDsafe - for that added safety!«

- The safe stand-alone unit
- All safe functions of the Safe+ module
- Also MVB, CAN and Ethernet communication
- Can be integrated into a DEUTA-system

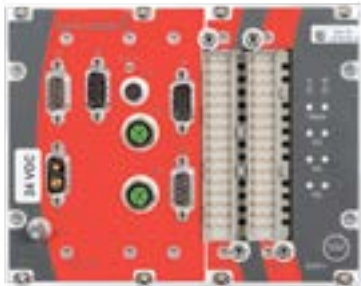

DEUTA REDsafe is the "stand-alone" unit for that added safety. It takes over safety functions for the requirement levels SIL 2 to SIL4 and thus extends the safety-related field of application of the DEUTA REDBOX® series. The REDsafe was developed according to the standards EN 50126, EN 50128, EN 50129 as well as EN 50155.

The concept of the DEUTA REDsafe allows high flexibility in the configuration, the parametrisation and the application, e.g. as a time-time or distance-distance DSD. The versatile hardware structure allows the REDsafe to be integrated easily into many different vehicle architectures.

DEUTA supports the expertise process of your REDsafe up to certification.

DEUTA REDsafe advantages at a glance

- Compact dimensions for 19" module racks
- Parametrisable 2-channel DSD
- Two-channel capability with different parameters
- Connection to all DEUTA sensors



REDsafe

Example configuration	DEUTA REDsafe
Operating voltage	24 VDC, 72 VDC or 110 VDC
Power consumption	max. 30 W
Temperature range	-25°C to +70°C (operation) -40 °C to +85 °C (storage)
2 frequency inputs	Squarewave, f _{max} 10,0 kHz, 2-channel
13 digital inputs	High level +12 to +154 V DC
1 analogue output	0 (4) to 20 mA
3 x 2 relay contacts	for brake, standstill, limit speed
2 relay contacts	for DSD lamp and buzzer
1 relay contact	for error output
1 vehicle bus	Ethernet
Service PC connection	1 Ethernet, 1 USB
Safety functions	Driving safety switch DSD Standstill detection Rollback protection Monitoring of the limit speed Monitoring of maximum speed Speed output
Dimensions	
Width	162.2 mm
Height	128.4 mm
Depth	169 mm
Weight	approx. 1 kg
Protection category	IP 20
Connection	2 x F48 plugs, DIN 41612 for IP 20 1 x USB 2 x Ethernet M12 1 x D-Sub plug 2-pin

»DEUTA REDBOX^{top} -

Symbiosis for greater freedom of variety!«

- Integration of a DEUTA REDBOX^{log} or REDBOX^{flex} with a crash-protected memory unit in an 84 TE 19" module rack
- Crash-protected memory unit in the basic version or retrofittable
- All REDBOX^{flex} versions can be integrated




Variety for individual requirements

DEUTA REDBOX^{top} in the basic version is a symbiosis of the variety of the "all-in-one" recorder REDBOX^{flex} and the protected travel data memory PMU in a 19" housing.

As a Safe+ variant, the REDBOX^{top} takes over additional safety functions such as the monitoring of the maximum and limit speed, the rollback protection, the standstill detection and the speed output. Another feature is the driving safety device (DSD).

Variable synergy

- Interface flexibility with high integration density
- Additional travel data security in the protected memory
- More monitoring safety with the Safe+ option

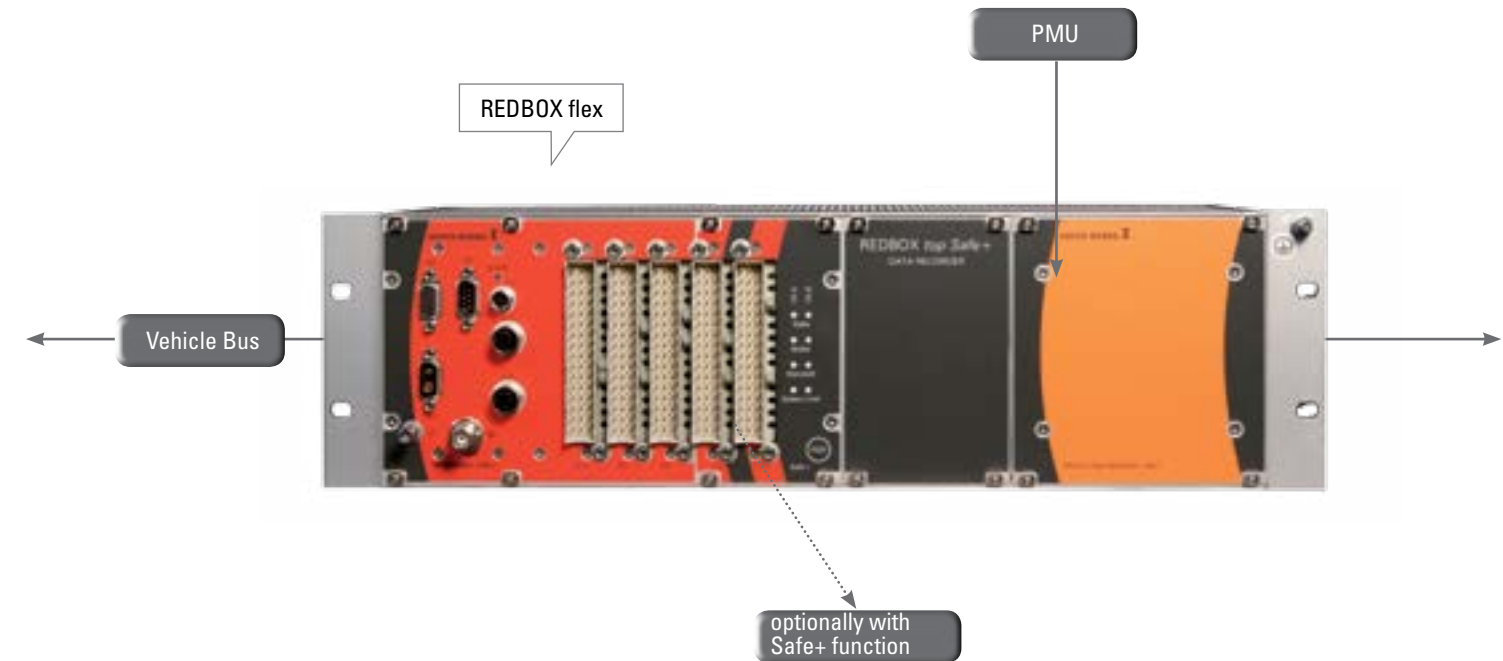

Technical properties/specification

The technical properties of a REDBOX^{top} vary according to the equipment of the multi-functional recorder.

Our product and project engineers will be happy to help you choose the optimum combination and find the right DEUTA REDBOX^{top} for your individual application.

»DEUTA REDBOXstar -

the Event Recorder!«

- Developed for the US market
- IEEE1482 and FRA-compatible
- Ethernet and RS422 communication
- For retrofit and PTC integration



REDBOXstar 1

PTC integrable compact unit

- Compact unit
- LSI 6 MCU rack mount compatible
- RS422 and Ethernet vehicle network



REDBOXstar 2

IEEE recorder

- Compact unit
- LSI 6 MCU rack mount compatible
- Exclusive IEEE1482.1 crash protected memory
- Vehicle bus RS422 – RS485
- Digital and analogue inputs
- Digital and relay outputs



REDBOXstar 3

Retrofit compatible event recorder -
For PTC and customised vehicle data

- Compact unit
- Digital inputs galvanically isolated
- Configurable analogue inputs
- Flexibility over easy configuration for the analogue input
- RS422 and Ethernet vehicle network
- Vehicle data compatible recording
- PTC compatible recording



REDBOXstar 1



REDBOXstar 2



REDBOXstar 3

Hardware

- Standard US power supply nominal value: 37.4 or 74 V ($\pm 30\%$)
- Crash hardened memory module with 1 GB (FRA certified)
- Ethernet ports for vehicle network, service and automatic data downloading via WLAN. Alternatively data downloading also via card reader unit or download box
- USB port for data downloading and software update
- RS422 serial interface (isolated)
- Digital and analogue inputs according to IEEE1482.1 (isolated)
- MIL Connectors
- Customised mounting plate for a better integration in the vehicle
- Multi-colour LED for visual status information

Onboard Software (application)

- Flexible configuration engineering
- Automatic configuration possibility depending on vehicle type (easy commissioning and replacement)
- Configurable data downloading procedure acc. to FRA-requirement (48 h) or customized downloading file with data selection e.g. time, distance etc.
- Downloading USB stick - standard or protected
- Automatic time synchronisation with interface or UTC time over GPS
- Geo data recording

Onboard Maintenance Web Interface


- Integrated web interface for service purposes
- Works with a standard web browser
- Works on different operating systems
- Convenient and easy to use
- Also usable via Ethernet interface
- Access to all service pages
- Different levels with password protection
- Process value display
- Detailed recorder status and statistic
- Setting of parameters (time setting, wheel diameter etc.) for vehicle number

Playback Software (Data analysis)

- Windows compatible
- Easy to use
- Defined data evaluation period
- Automatic FRA report (48 h – signals statistic)
- Time or distance view
- Search functions
- ... and many other data evaluation features

»DEUTA REDBOXopen - open for All Events!«

- Basic recorder with extension options
- Optimal as a basic unit with project-related adaptation requirements
- Maximum flexibility in the engineering phase of a project

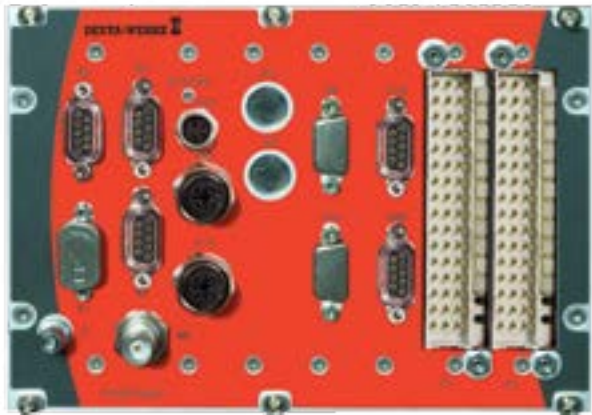

REDBOXopen

Example configuration	DEUTA REDBOXopen
Operating voltage	Nominal 24, 72 or 110V
Power consumption	max. 30 W
Temperature range	-25°C to +70°C (operation) -40 °C to +85 °C (storage)
Frequency inputs	project-dependent
Analogue inputs	project-dependent
Digital inputs	project-dependent
Recording raster	project-dependent
Storage medium	int. CompactFlash 2 GB
Analogue outputs	project-dependent
Frequency outputs	project-dependent
Outputs	project-dependent
Vehicle buses	MVB, Ethernet CAN & Profibus optionally
Serial interfaces	RS 232, RS 422/485 optionally
Service connections	1 Ethernet, 1 USB
Tracking	GPS
Dimensions	
Width	40 TE (202 mm)
Height	128.4 mm (3 HE)
Depth	169 mm
Weight	approx. 2,5 kg
Protection category	IP 20
Connection	4 x F48 plugs, DIN 41612 for IP 20 2 M12 d round plug, M8 round plug (Ethernet) 4 x D-Sub plug 9-pin (USB)




The REDBOX for all applications

The DEUTA REDBOXopen is equipped for all applications. The open architecture leaves a lot of room for customers' wishes. Software and hardware extensions can be integrated easily into the 19" housing years after its first use if required.

»DEUTA REDBOX^{master} - one REDBOX for All!«

- MVB Master function
- Flexibility like the REDBOX^{open}
- Project-related structure
- Complete DEUTA engineering

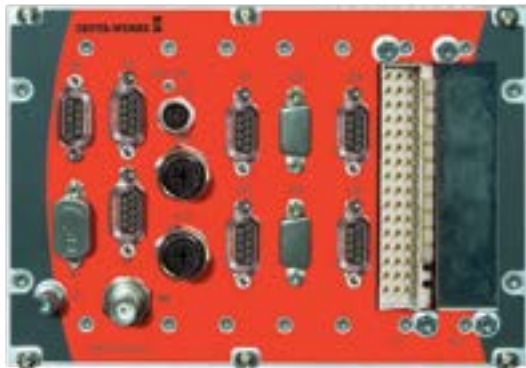

Central point of an MVB
The REDBOX^{master} takes over the master function in a Multi-Vehicle-Bus. All other REDBOX properties are retained hereby - including the flexibility of the hardware structure.

This reduces the variety in the equipping phase and minimises your configuration costs.



REDBOX^{master}

Example configuration	DEUTA REDBOX ^{master}
Operating voltage	Nominal 24, 72 or 110V
Power consumption	max. 30 W
Temperature range	-25°C to +70°C (operation) -40 °C to +85 °C (storage)
2 frequency inputs	Squarewave, f _{max} 10,0 kHz
2 analogue inputs	± 0 to 10 V or 0 (4) to 20 mA
24 digital inputs	High level +12 to +154 V DC
Recording raster	Triggered by distance, time or event
Storage medium	int. CompactFlash 2 GB
2 analogue outputs	0 to 10 V or 0 (4) to 20 mA
2 frequency outputs	Squarewave, f _{max} 5,0 kHz
Outputs	2 transistor outputs with Open Collector
Vehicle buses	MVB, Ethernet CAN & Profibus optionally
Serial interfaces	RS 232, RS 422/485 optionally
Service connections	1Ethernet, 1 USB
Example configuration	safe+
Safety functions	Driving safety switch DSD Standstill detection Rollback detection Monitoring of the limit speed Monitoring of maximum speed Speed signals
Dimensions	
Width	40 TE (202 mm)
Height	128.4 mm (3 HE)
Depth	169 mm
Weight	approx. 2,5 kg
Protection category	IP 20
Connection	4 x F48 plugs, DIN 41612 for IP 20 2 M12 d round plug, M8 round plug (Ethernet) 4 x D-Sub plug 9-pin (USB)

»DEUTA PMU - Protected Data Memory - optimally protected against stresses in railway traffic!«

- for data protection according to GM/RT2472 / IEEE1482 / FRA49 CFR
- int. Compact Flash with 1 GB or 2 GB
- USB connection
- for stand-alone without 19" technology assembly
- Can be connected to all REDBOX*flex* or REDBOX*log*



The DEUTA Protected Memory Unit (PMU) adds a protected travel data memory to the REDBOX multi-functional recorder family. The special structure of the housing is optimised to withstand the extreme mechanical and thermal stresses in exceptional situations.

- Housing**
- Space-saving and compact
 - As a stand-alone unit with fastening bracket set (PMU 23/PMU 24)
 - Can be mounted alternatively in the 19" module rack (PMU 22)
- The interface**
- with USB interface
- The load capacity**
- Shock and vibration as per EN 60068
 - Fire protection as per DIN 5510-2 and EN 45554
 - Mechanical load capacity as per IEEE St 1482-1999 (PMU 23, PMU 24)
 - Mechanical load capacity as per GM/RT 24/72 (PMU 22)




PMU 22 / PMU 23 / PMU 24

Feature/Specification	PMU 22	PMU 23	PMU 24
Standards	GM/RT 24/72	IEEE Std. 1482.1-1999	IEEE Std. 1482.1-1999 FRA Directive 49, (FRA 49 CFR Part 229, § 229.135 Appendix D)
Power consumption	max. 180 mA	max. 130 mA	max. 130 mA
Temperature range	-25°C to +70°C (operation) -40 °C to +85 °C (storage)	-25°C to +70°C (operation) -40 °C to +85 °C (storage)	-25°C to +70°C (operation) -40 °C to +85 °C (storage)
Storage medium	int. CompactFlash 2 GB	int. CompactFlash 1 GB	int. CompactFlash 1 GB
Service PC connection	1x USB	1x USB	1x USB
Dimensions			
Width	122 mm (4.8 inch)	120 mm (4.72 inch) without fastening bracket 180 mm (7.09 inch) with fastening bracket	160 mm (6.3 inch) without fastening bracket 220 mm (8.7 inch) with fastening bracket
Height	129 mm (5.08 inch)	120 mm (4.72 inch) without fastening bracket 125 mm (4.92 inch) with fastening bracket	160 mm (6.3 inch) without fastening bracket 165 mm (6.5 inch) with fastening bracket
Depth	168 mm (6.61 inch)	233 mm (9.17 inch)	257 mm (10.1 inch)
Weight	approx. 2 kg	approx. 7,5 kg	approx. 13 kg
Protection category	IP X4	Outside housing IP 20 (mechanical protection) Inside housing IP 67 (tightness protection)	Outside housing IP 20 (mechanical protection) Inside housing IP 67 (tightness protection)
Load capacity of the housing			
Static pressure	20 kN (25 mm diam. /1 min.)	110 kN (25000 lbf) for 5 min.	110 kN (25000 lbf) for 5 min.
Penetration	no requirement	Steel bolts: 6.4 mm (0.25 inch) diameter and 23 kg (50 lb) weight at a fall height of 1.5 m (5.0 feet)	Steel bolts: 6.4 mm (0.25 inch) diameter and 23 kg (50 lb) weight at a fall height of 1.5 m (5.0 feet)
Shock	100 g Peak (10 ms duration)	55 g Peak (100 ms duration)	55 g Peak (100 ms duration)
Thermal load capacity	700 °C (approx. 5 min.)	650 °C (1200 °F) for approx. 30 min. 300 °C (570° F) for approx. 60 min. 100 °C (212 °F) for approx. 5 hrs.	750 °C (1382 °F) for approx. 60 min. (FRA) 650 °C (1200 °F) for approx. 30 min. (IEEE) 300 °C (570° F) for approx. 60 min. (IEEE) 260 °C (570° F) for approx. 10 hrs. (FRA) 100 °C (212 °F) for approx. 5 hrs. (IEEE)
Tightness	60 minutes each: Mains water: Fire extinguisher foam, coolant 134 A	#1 Diesel (ASTM D975), #2 Diesel (ASTM D975), water, salt water, lubricating oil (each liquid for 48 hrs, immersion in fire extinguishing agent for 10 min.)	#1 Diesel (ASTM D975), #2 Diesel (ASTM D975), water, salt water, lubricating oil (each liquid for 48 h, immersion in fire extinguishing agent for 10 min.)
Hydrostatic pressure	no requirement	15 m depth (50 feet) for 48 hours Salt water 15 m depth (48 hrs.)	15 m depth (50 feet) for 48 hours Salt water 15 m depth (48 hrs.)

»DEUTA ADS 4 - the Efficient Evaluation Software!«

DEUTA ADS 4 - the future-gearred evaluation software with which you can evaluate travel data conveniently and efficiently. The software is compatible with all products of the DEUTA REDBOX® series as well as the predecessor DEUTA recorder types such as KWR, DSK and EFA.

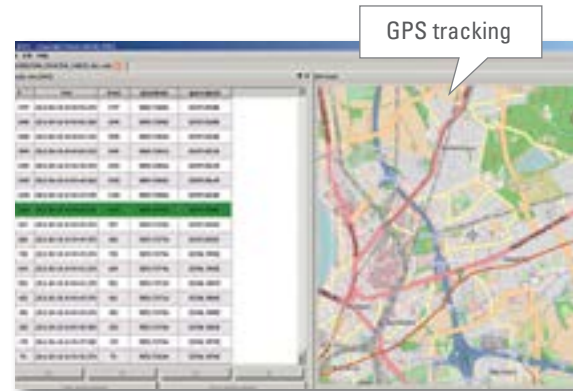

Convenient download by USB stick


The data medium protects the travel data from manipulation. You can load the data from the recorder either with a USB stick or an Ethernet connection. A password reliably protects the output of your travel data against unauthorised access. ETCS data, train security, video and audio data are read in with filter functions for data input and output.

Graphics and tables synchronously on one screen


The innovative user interface of the ADS 4 presents all data clearly at a glance with freely configurable windows and tabs. Speed, analogue and digital tracks, ETCS data and train security data are displayed synchronously. You have the choice of viewing the data chronologically (time-based) or over a certain stretch of the track (route-based). The table display shows decoded signals and messages chronologically. Additional items of information such as vehicle number, owner and data scope are also provided.

GPS tracking and video data for even greater clarity

Optional GPS and video data make your data even more transparent. You can track the route virtually on a railmap on the GPS screen. In addition, the video data of the camera shots also give you a clear view of the route.

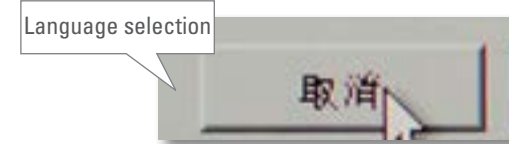

ADS 4 speaks **many languages** – Easy language change for example to Chinese, German, English, Italian, Dutch, Polish, Portuguese, Russian, Spanish, Hungarian ... for world-wide use and also at operating level the ADS 4 is multi-talented and compatible with LINUX, Windows XP / Windows 7 and Mac OS.

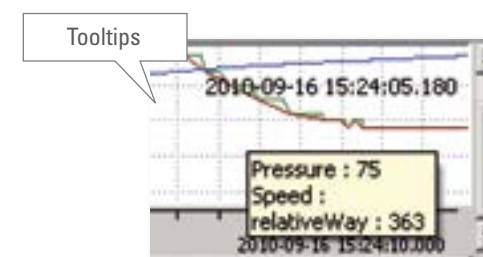


The helpful **context menus** offer clear text. For every message ID visible as a numeric value in the table, it is displayed what type of information it conceals.




With a highly advanced **search and filter function** you can search forwards and backwards in the data records for events or track values or you can compare nominal and actual travel data with each other. Fleet data can also be evaluated independently of vehicle and data record in this way.




An **online help** for every dialogue is available in the ADS 4. It provides quick, clear answers to the basic questions of handling the ADS 4 evaluation software.

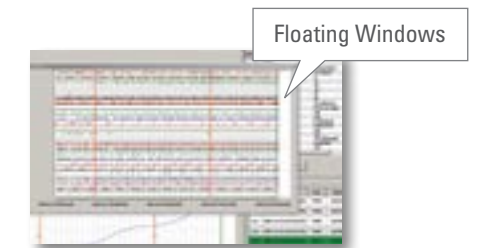


Floating Windows – You can determine how the train data are presented to you individually for every train and configure them with drag&drop. You can save every layout configuration.

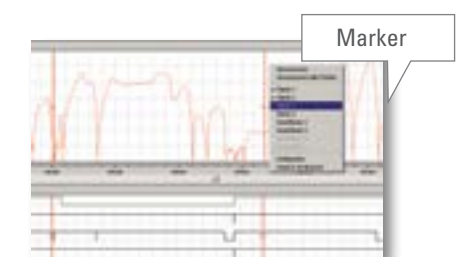

You set **markers** and compare the results quickly and easily with each other: Braking processes, signal sequences or other relevant events.

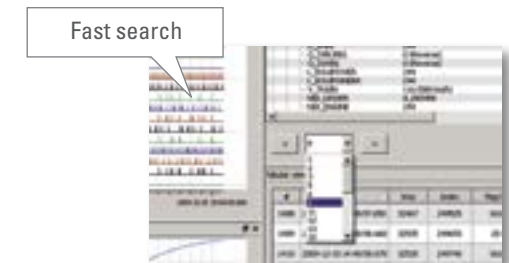

With the **quick search** you can jump rapidly from one event to the next. You can choose whether you are interested in the graphical ETCS data, the event in the stretch of track or the table view.

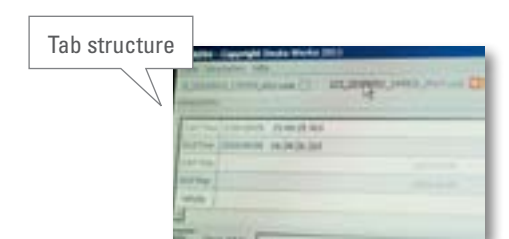

Tab structure – the next train is just one click away. The ADS 4 evaluation software can be operated elegantly with the tab structure. You simply jump back and forth between the data records of different trains. Tab by tab, train by train.

»DEUTA Web Interface & Telemaintenance -

Innovative Service Concepts!«

- Recording and evaluation of video and travel data
- Additional items of information such as distance, time, speed and direction
- Reliable reconstruction and analysis of damage and event cases



Diagnostics



Device status



Readout

DEUTA REDBOX® with Web Interface

With the REDBOX Web Interface you have your REDBOX under control world-wide via W-LAN. The Web Interface works with a standard Web browser on different operating systems and is practical and easy to handle. If your vehicle is not yet equipped with W-LAN, use the Ethernet interface of your DEUTA REDBOX. In connection with a laptop, you then have all the service sites at your disposal.

A small selection of the access possibilities:

- Device status check, e.g. filling level of the data memory or communication status
- Setting of parameters such as device parameters and input possibility for vehicle number
- Display of selected process values
- Display of diagnostic messages
- Display of software statuses
- Language setting of the Service Web Interface
- Test runs in the service mode
- Read out and send configuration data



Telemaintenance - we are always close by - no matter where you may be.

For us, product support does not stop with commissioning. The DEUTA staff are always close by when you need help. Professional support and fast response times are a matter of course for us. The REDBOX® telemaintenance package reduces service times. We make configuration changes, software updates and provide many other services within our telemaintenance packages.

DEUTA-WERKE

DEUTA-WERKE GmbH

Paffrather Straße 140 · 51465 Bergisch Gladbach · Deutschland

Tel. +49 (0) 22 02 958-100 · Fax +49 (0) 22 02 958-145

support@deuta.de · www.deuta.de



DEUTA AMERICA

Deuta America Corporation

225 Oser Ave. · Hauppauge, NY 11788 · U.S.A.

Tel. +49-175-577-6442

info@deuta-america.com · www.deuta-america.com